

Locking pins with key ring

Item description/product images



Description

Material:

Pin steel.

Key ring stainless steel.

Version:

Pins galvanized.

Key ring bright.


Note:

Locking pins are used for quick and easy fixating and joining of parts and workpieces.

Shearing force double shear (F) = $S \cdot \tau \cdot aB$ max.

The locking pins with key ring represent a cost-effective alternative to other locking pins.

Drawings

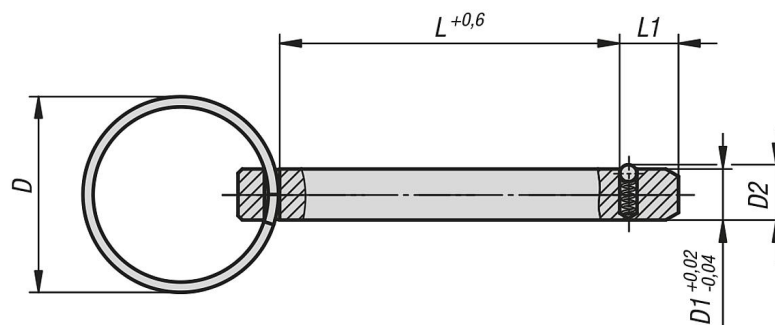

Overview of items

Locking pins with key ring

Order No.	D	D1	D2	L	L1	Shearing force double shear max.kN
K0365.102306015	23	6	6,5	15	7	22
K0365.102306020	23	6	6,5	20	7	22
K0365.102306030	23	6	6,5	30	7	22
K0365.102306040	23	6	6,5	40	7	22
K0365.102808030	28	8	8,8	30	8	38
K0365.102808040	28	8	8,8	40	8	38
K0365.102808050	28	8	8,8	50	8	38