


Magnets shallow pot with thread hard ferrite

Item description/product images

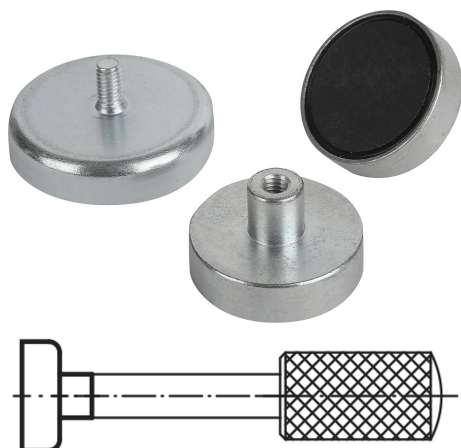

Description

Material:

Housing, steel.

Magnetic core hard ferrite.

Version:

Housing, galvanized.

Note:

Shallow pot magnets, shielded system.

Hairline cracks in the magnetic material are unavoidable for technical reasons in D=80, D=100 and D=125 versions. They do not impair the attracting function of the magnets in any way.


Temperature range:

max. 200°C.

Drawing reference:

1) magnetic face

Drawings

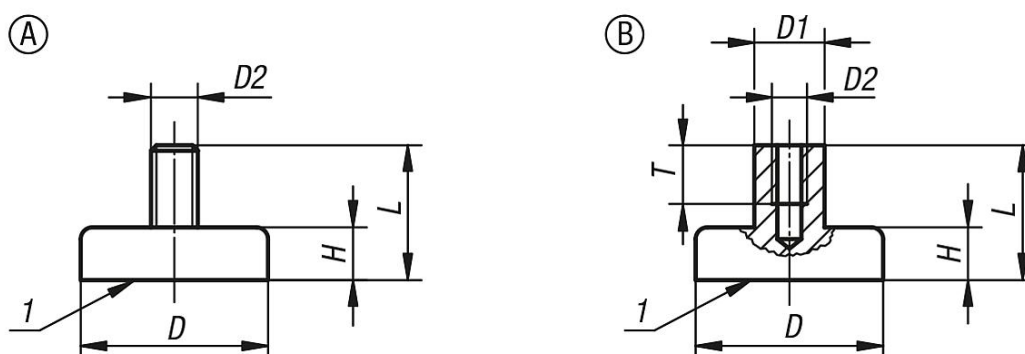

Overview of items

Magnets shallow pot with thread, hard ferrite

Order No. Form A	Order No. Form B	D	D1	D2	L	H	T	Magnetic force N
K0549.21	K0549.01	10 ±0,15	-/6	M3	11,5	4,5	-/5	4
K0549.22	K0549.02	13 ±0,15	-/6	M3	11,5	4,5	-/5	10
K0549.23	K0549.03	16 ±0,15	-/6	M3	11,5	4,5	-/5	18
K0549.24	K0549.04	20 ±0,15	-/6	M3	13	6	-/5	30
K0549.25	K0549.05	25 ±0,15	-/8	M4	15	7	-/6	40
K0549.26	K0549.06	32 ±0,20	-/8	M4	15	7	-/6	80
-	K0549.07	40 ±0,20	10	M5	18	8	8	125
-	K0549.08	50 ±0,20	12	M6	22	10	10	220
-	K0549.09	63 ±0,20	15	M8	30	14	14	350
-	K0549.10	80 ±0,25	20	M10	34	18	14	600
-	K0549.11	99 ±0,25	22	M12	42	22	17	900
-	K0549.12	125 ±0,25	25	M14	50	26	20	1300