

Shaft collars tapped

Item description/product images



Description

Material:

Steel 1.0718.

Stainless steel 1.4305.

Version:

Steel black oxidised.

Screw 12.9 steel.

Stainless steel brig.ht

Screw A2-70 stainless-steel.

Note:


Shaft collars with thread surround the shaft with an equal distribution of clamping forces.

The shaft collars can be used on threaded rods or shafts with a thread tolerance of 6g.

Temperature range:

-40 °C to +175 °C.

Drawings

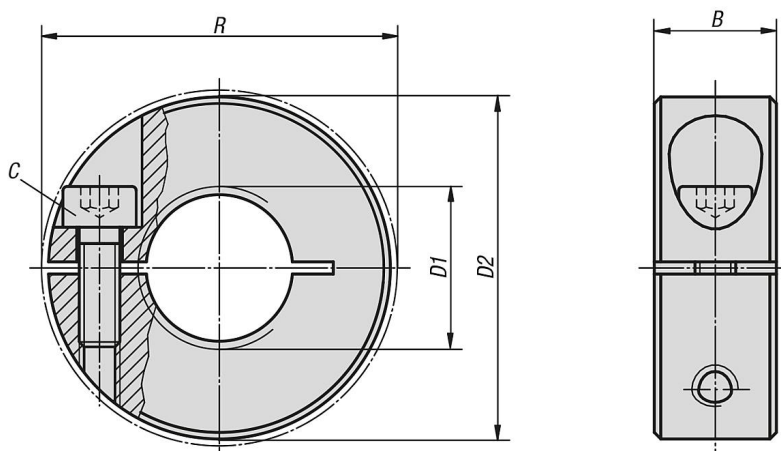

Overview of items

Shaft collars tapped

Order No.	Main material	B	C	D1	D2	R
K0986.0401	Steel	9	M3x8	M4	16	20,7
K0986.0501	Steel	9	M3x8	M5	16	20,7
K0986.0601	Steel	9	M3x8	M6	16	20,7
K0986.0801	Steel	9	M3x8	M8	18	22,4
K0986.1001	Steel	9	M3x10	M10	24	26
K0986.1201	Steel	11	M4x12	M12	28	31,8
K0986.1601	Steel	13	M5x16	M16	34	39,4
K0986.2001	Steel	15	M6x18	M20	40	46,4
K0986.0402	Stainless steel	9	M3x8	M4	16	20,7
K0986.0502	Stainless steel	9	M3x8	M5	16	20,7
K0986.0602	Stainless steel	9	M3x8	M6	16	20,7

Shaft collars tapped

Overview of items

Order No.	Main material	B	C	D1	D2	R
K0986.0802	Stainless steel	9	M3x8	M8	18	22,4
K0986.1002	Stainless steel	9	M3x10	M10	24	26
K0986.1202	Stainless steel	11	M4x12	M12	28	31,8
K0986.1602	Stainless steel	13	M5x16	M16	34	39,4
K0986.2002	Stainless steel	15	M6x18	M20	40	46,4