

Rubber buffers stainless steel, type B

Item description/product images



Description

Material:

Metal parts 1.4401 stainless steel.

Elastomer natural rubber, medium hardness Shore 55A, grey.

Version:

Stainless steel bright.

Note:

Rubber buffers are widely-used construction elements for elastic mounting. They are used, among other things, as mountings for aggregates, motors, compressors, pumps and testing machinery.


Temperature range:

-30°C to +80°C.

On request:

Metal parts 1.4301 stainless steel.

Drawings

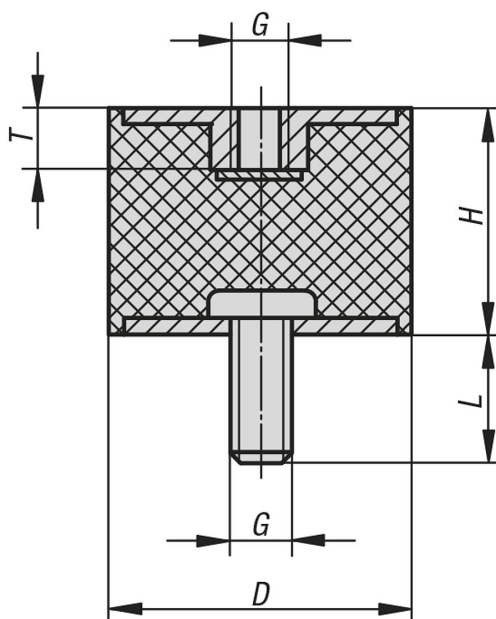

Overview of items

Rubber buffers, stainless steel, type B

Order No.	Main material	Main colour	D	H	G	L	T	Spring stiffness N/mm	Load N
K1321.00800855	stainless steel	-	8	8	M3	6	3	35	17
K1321.01001055	stainless steel	-	10	10	M4	10	4	75	75
K1321.01001555	stainless steel	-	10	15	M4	10	4	50	60
K1321.01501055	stainless steel	-	15	10	M4	10	4	130	130
K1321.01501555	stainless steel	-	15	15	M4	10	4	100	120
K1321.02001555	stainless steel	-	20	15	M6	18	5	325	390

Rubber buffers stainless steel, type B

Overview of items

Order No.	Main material	Main colour	D	H	G	L	T	Spring stiffness N/mm	Load N
K1321.02002055	stainless steel	-	20	20	M6	18	5	130	260
K1321.02002555	stainless steel	-	20	25	M6	18	5	95	210
K1321.02501555	stainless steel	-	25	15	M6	18	5	333	399
K1321.02502055	stainless steel	-	25	20	M6	18	5	195	410
K1321.02502555	stainless steel	-	25	25	M6	18	5	117	257
K1321.02503055	stainless steel	-	25	30	M6	18	5	100	300
K1321.03001555	stainless steel	-	30	15	M8	23	7	590	708
K1321.03002055	stainless steel	-	30	20	M8	23	7	280	560
K1321.03002555	stainless steel	-	30	25	M8	23	7	180	396
K1321.03003055	stainless steel	-	30	30	M8	23	7	168	504
K1321.03004055	stainless steel	-	30	40	M8	23	7	88	308
K1321.04002055	stainless steel	-	40	20	M8	23	7	700	840
K1321.04003055	stainless steel	-	40	30	M8	23	7	273	820
K1321.04004055	stainless steel	-	40	40	M8	23	7	189	660
K1321.05002055	stainless steel	-	50	20	M10	28	8	1471	2500
K1321.05002555	stainless steel	-	50	25	M10	28	8	630	1386
K1321.05003055	stainless steel	-	50	30	M10	28	8	545	1635
K1321.05004055	stainless steel	-	50	40	M10	28	8	310	1116
K1321.05005055	stainless steel	-	50	50	M10	28	8	180	900
K1321.06004055	stainless steel	-	60	40	M10	28	8	500	1750
K1321.07004555	stainless steel	-	70	45	M10	28	8	600	2400
K1321.07502555	stainless steel	-	75	25	M12	37	10	2440	3660
K1321.07504055	stainless steel	-	75	40	M12	37	10	700	2450
K1321.07505055	stainless steel	-	75	50	M12	37	10	520	2600
K1321.07505555	stainless steel	-	75	55	M12	37	10	396	2178