


Rubber buffers stainless steel, type E

Item description/product images

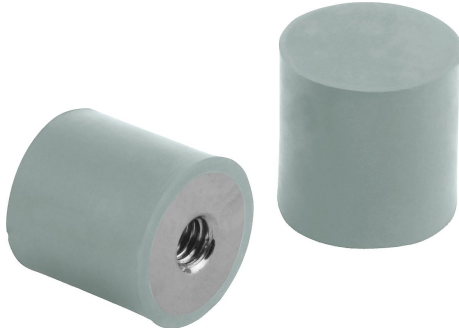

Description

Material:

Metal parts 1.4401 stainless steel.

Elastomer natural rubber, medium hardness Shore 55A, grey.

Version:

Stainless steel bright.

Note:

Rubber buffers are widely-used construction elements for elastic mounting. They are used, among other things, as mountings for aggregates, motors, compressors, pumps and testing machinery.


Temperature range:

-30°C to +80°C.

On request:

Metal parts 1.4301 stainless steel.

Drawings

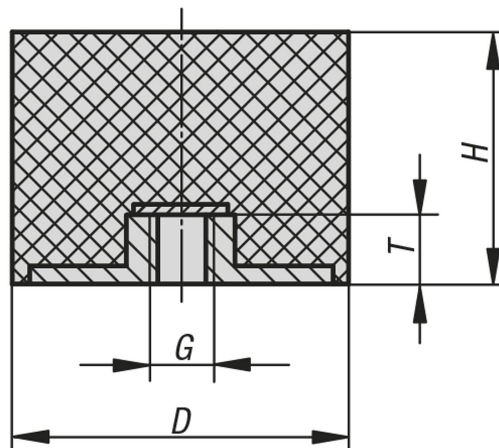

Overview of items

Rubber buffers, stainless steel, type E

Order No.	Main material	Main colour	D	H	G	T	Spring stiffness N/mm	Load N
K1319.00800855	stainless steel	-	8	8	M3	3	88	44
K1319.01501255	stainless steel	-	15	12	M4	4	165	182
K1319.01501555	stainless steel	-	15	15	M4	4	100	130
K1319.01502055	stainless steel	-	15	20	M4	4	75	113
K1319.02001555	stainless steel	-	20	15	M6	6	145	246
K1319.02002055	stainless steel	-	20	20	M6	6	94	216
K1319.02002555	stainless steel	-	20	25	M6	6	65	169
K1319.02501555	stainless steel	-	25	15	M8	6	270	540
K1319.02502555	stainless steel	-	25	25	M8	6	105	315
K1319.02503055	stainless steel	-	25	30	M8	6	85	281
K1319.02504055	stainless steel	-	25	40	M8	6	75	300
K1319.03001555	stainless steel	-	30	15	M8	8	545	491

Rubber buffers stainless steel, type E

Overview of items

Order No.	Main material	Main colour	D	H	G	T	Spring stiffness N/mm	Load N
K1319.03002555	stainless steel	-	30	25	M8	8	160	416
K1319.03003055	stainless steel	-	30	30	M8	8	125	425
K1319.03004055	stainless steel	-	30	40	M8	8	85	315
K1319.04002055	stainless steel	-	40	20	M8	8	550	660
K1319.04002555	stainless steel	-	40	25	M8	8	500	1000
K1319.04003055	stainless steel	-	40	30	M8	8	300	870
K1319.04004055	stainless steel	-	40	40	M8	8	260	1040
K1319.05002055	stainless steel	-	50	20	M10	10	860	860
K1319.05002555	stainless steel	-	50	25	M10	10	700	1400
K1319.05003055	stainless steel	-	50	30	M10	10	450	1575
K1319.05004055	stainless steel	-	50	40	M10	10	350	1400
K1319.05005055	stainless steel	-	50	50	M10	10	170	850
K1319.06003055	stainless steel	-	60	30	M10	10	700	1400
K1319.06004055	stainless steel	-	60	40	M10	10	400	1600
K1319.06005055	stainless steel	-	60	50	M10	10	240	1200
K1319.07004255	stainless steel	-	70	42	M10	10	520	2600
K1319.07004555	stainless steel	-	70	45	M10	10	680	3060
K1319.07502555	stainless steel	-	75	25	M12	12	1211	1816
K1319.07503055	stainless steel	-	75	30	M12	12	1090	2289
K1319.07504055	stainless steel	-	75	40	M12	12	500	2000
K1319.07505055	stainless steel	-	75	50	M12	12	550	2750